

TECHNICAL DATA SHEET

WOIL WHITE GREASE

DESCRIPTION

The white grease for general applications, has a good oxidation stability, with good resistance to water, heat, and corrosion. It can be used at high temperatures and it stays pumpable at low temperatures making it suitable for bearing lubrication.

CARACTERISTICS

- Produced from high performance additives and Ca (calcium) soap.
- Contains oxidation preventing additives, therefore it has a longer stocking period.
- Shows high endurance on the bearings that has contact with water and sticks to surface.
- It provides perfect oiling and under heavy-duty conditions, thanks to the additives it contains. High pumping capacity.
- Safely used during every season.

APPLICATION


To be used safely on greasing spots of agricultural machines, industrial machines, sliding surfaces, light medium and high flat ball bearings, and all kind of automotive equipment.

PERFOMANCE

- DIN: 51502
- DIN: K2K-30
- ISO: 6743
- L-XCCEA4

TYPICAL PROPERTIES

WHITE GREASE				
NLGI No:	0	1	2	3
Color	White	White	White	White
Soap Type	Calcium	Calcium	Calcium	Calcium
Penetration (25°C/60Storke)	355-385	310-340	265-295	220-250
Dropping Point, °C, min.	90	100	100	100
Working Temperature, °C, max.	90	100	100	100

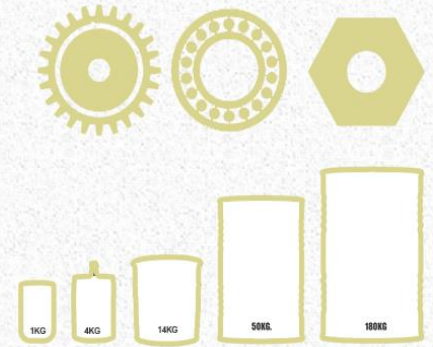

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

