

# TECHNICAL DATA SHEET

## HYBRID PRO 0W16 FULL SYN

### DESCRIPTION

A full synthetic lubricant is designed to deliver outstanding engine protection, enhanced fuel economy benefits, keep your engine running like New and protect critical engine parts for up to 10,000 miles between oil changes.

### CARACTERISTICS

- Good resistance against shearing.
- Lower fuel consumption.
- Very strong protection against wear, corrosion and foaming.
- Provides high engine performance by reducing the friction.
- Provide protection against power lost and ensure continuity of engine functioning.
- Safe lubrication film.

### APPLICATION


It is suitable for hybrid vehicles, passengers vehicles.

### PERFOMANCE

- API: SN/CF

### TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,85
K. Viscosity @ 40 °C	ASTM D 445	cSt	37.65
K. Viscosity @ 100 °C	ASTM D 446	cSt	7.36
Viscosity Index	ASTM D 2270		165
Flash Point	ASTM D 92	°C	225
Pour Point	ASTM D 97	°C	-35

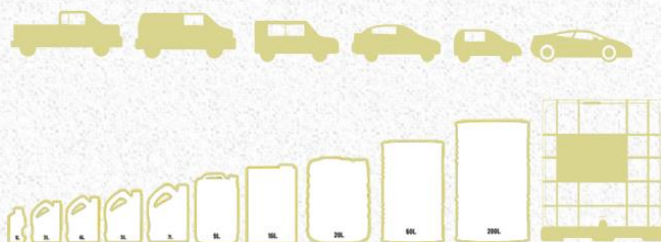

### CONTACT US

[www.woil.com.tr](http://www.woil.com.tr)  
[info@ozersahenerji.com](mailto:info@ozersahenerji.com)



Çerkeşli Köyü Yolu  
Üzeri GEBKİM Kimyaçılar OSB,  
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

