

TECHNICAL DATA SHEET

WOIL MONO SUPER SAE 10

DESCRIPTION

This 10 monograde engine oil is characterized by a combination of good detergent and dispersant properties, together with a low ash content suitable for a large range of vehicles.

CARACTERISTICS

- Prevention of deposit and sludge accumulation in the engine;
- Perfect for extremely hot climates/summer conditions;
- Resistance against piston varnishing under heavy load;
- Keeps the engine clean by preventing the formation of deposits and residues.

APPLICATION


Woil super 10 is formulated with quality mineral base oils and additives for the lubrication of gasoline and diesel engines of all type of passenger & commercial vehicles.

PERFOMANCE

- API :SF/CF

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0.872
K. Viscosity @ 40 °C	ASTM D 445	cSt	32
K. Viscosity @ 100 °C	ASTM D 446	cSt	6.3
Viscosity Index	ASTM D 2270		151
Flash Point	ASTM D 92	°C	220
Pour Point	ASTM D 97	°C	-21

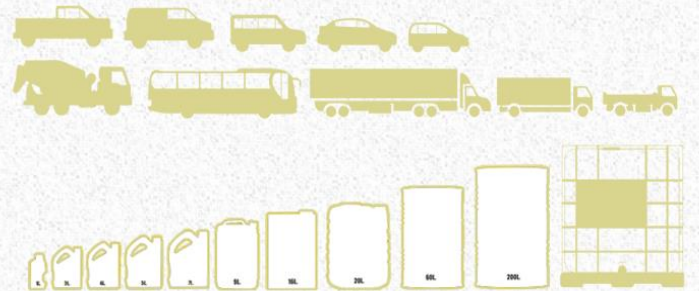

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

