

# TECHNICAL DATA SHEET

## WOIL MONO SUPER SAE 30

### DESCRIPTION

This 30 monograde engine oil is characterized by a combination of good detergent and dispersant properties, together with a low ash content suitable for a large range of vehicles.

### CARACTERISTICS

- Prevention of deposit and sludge accumulation in the engine;
- Perfect for extremely hot climates/summer conditions;
- Resistance against piston varnishing under heavy load;
- Keeps the engine clean by preventing the formation of deposits and residues.

### APPLICATION


Woil super 30 is formulated with quality mineral base oils and additives for the lubrication of gasoline and diesel engines of all type of passenger & commercial vehicles.

### PERFOMANCE

- API :SF/CF, CD

### TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0.88
K. Viscosity @ 40 °C	ASTM D 445	cSt	102
K. Viscosity @ 100 °C	ASTM D 446	cSt	11.2
Viscosity Index	ASTM D 2270		96
Flash Point	ASTM D 92	°C	220
Pour Point	ASTM D 97	°C	-15

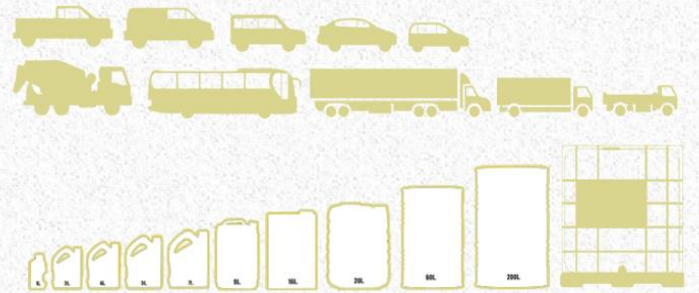

### CONTACT US

www.woil.com.tr  
info@ozersahenerji.com



Çerkeşli Köyü Yolu  
Üzeri GEBKİM Kimyacılar OSB,  
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

