

TECHNICAL DATA SHEET

WOIL MOTO PRO 4T 10W40

DESCRIPTION

Woil 4T 10W40, is a synthetic based motorcycle oil which provides ultra high performance in all riding and climate conditions due to its special formulation. It has been specially developed to meet the requirements of the leading motor cycle manufacturers. It is suitable to use in motorcycles with dry or wet clutch systems.

CARACTERISTICS

- Keeps the engine clean by controlling the mud and deposit formation that occurs under high temperatures thanks to its developed active cleaning feature.
- Provides high performance even under the most difficult work conditions and under a very low temperatures.
- Provides better film durability thanks to its high viscosity index, preventing the oil film tearing.
- Provides maximum protection against abrasion which may occur during the first operation.

APPLICATION


A high performance engine oil, formulated with high quality base oils and superior additive technology. Four season usage is recommended for the four-stroke motorcycles, of which viscosity and performance level requirements are suitable.

PERFORMANCE

- API:SL,
- JASO:MA/MA2

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,88
K. Viscosity @ 40 °C	ASTM D 445	cSt	87,9
K. Viscosity @ 100 °C	ASTM D 446	cSt	14,5
Viscosity Index	ASTM D 2270		172
Flash Point	ASTM D 92	°C	228
Pour Point	ASTM D 97	°C	-27

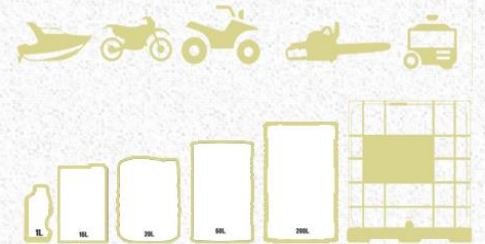

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

