

TECHNICAL DATA SHEET

WOIL MOTO PRO 4T 15W40

DESCRIPTION

Woil 4T 15W40 is a high quality multi grade engine oil for daily use in small 4-stroke engines. Its formulation is adapted for integrated gear boxes and is very suitable for smaller 4-stroke engines for normal use. Also applicable for engines with somewhat older technology

CARACTERISTICS

- Keeps the engine clean by controlling the mud and deposit formation that occurs under high temperatures thanks to its developed active cleaning feature.
- Provides high performance even under the most difficult work conditions and under every climate condition.
- Provides better film durability thanks to its high viscosity index, preventing the oil film tearing.
- Provides maximum protection against abrasion which may occur during the first operation

APPLICATION


A high performance engine oil, formulated with high quality base oils and superior additive technology. Four season usage is recommended for the four-stroke motorcycles, of which viscosity and performance level requirements are suitable.

PERFORMANCE

- API:SL,
- JASO:MA/MA2

TYPICAL PROPERTIES

| TEST | METHOD | UNIT | TYPICAL VALUES |
|-----------------------|-------------|------|----------------|
| Density @ 15 °C | ASTM D 4052 | g/ml | 0,88 |
| K. Viscosity @ 40 °C | ASTM D 445 | cSt | 117.7 |
| K. Viscosity @ 100 °C | ASTM D 446 | cSt | 14.5 |
| Viscosity Index | ASTM D 2270 | | 125 |
| Flash Point | ASTM D 92 | °C | 230 |
| Pour Point | ASTM D 97 | °C | -25 |

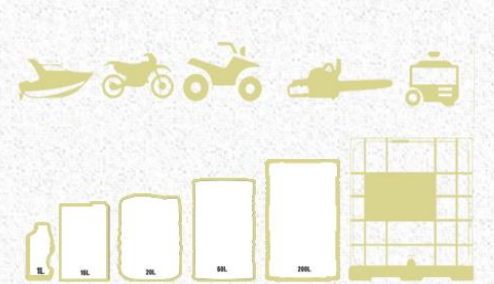

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

