

TECHNICAL DATA SHEET

WOIL POWER SHIFT ATF II DX

DESCRIPTION

ATF II DEXRON is an automatic transmission fluid with a high viscosity index for automatic transmissions.

CARACTERISTICS

- Extends the life of the automatic transmission systems thanks to the quality composition of base oils and the additives in its formula that prevent the rust, corrosion, and oxidation;
- Creates the optimum film layer for perfect lubrication and prevents the wear in scope of the bearings and gears;
- An extended oil life by optimizing thermal and oxidation stability.

APPLICATION


It is used to lubricate the automobiles, trucks, mobile hydraulic equipments, automatic or power shift transmissions, clutches, and power steering wheel gear boxes.

PERFOMANCE

- GM:6137-M;
- DEXRON: II-D.

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,875
K. Viscosity @ 40 °C	ASTM D 445	cSt	36,4
K. Viscosity @ 100 °C	ASTM D 446	cSt	6,85
Viscosity Index	ASTM D 2270		150
Flash Point	ASTM D 92	°C	220
Pour Point	ASTM D 97	°C	-35

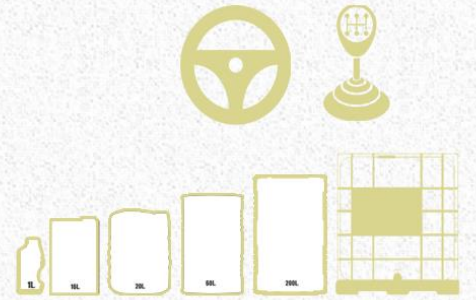

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

