

TECHNICAL DATA SHEET

PRO POWER 0W20 FULL SYN

DESCRIPTION

A full synthetic lubricant that has been developed to meet the specific requirements of manufactures of new-generation and high-performance engines.

CARACTERISTICS

- Total engine protection against corrosion for the new-generation engines under all driving conditions.
- Reduce oil consumption thanks to its low volatility.
- Reduce the hydrocarbon pollution
- High-control of residues and mud thanks to its active cleaning feature, therefore reducing maintenance costs.

APPLICATION


Suitable for all New generation gasoline or diesel engines and can be used at every season.

PERFOMANCE

- API: SN/CF

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,89
K. Viscosity @ 40 °C	ASTM D 445	cSt	244,6
K. Viscosity @ 100 °C	ASTM D 446	cSt	min.25
Viscosity Index	ASTM D 2270		min.130
Flash Point	ASTM D 92	°C	min.205
Pour Point	ASTM D 97	°C	max.(-21)

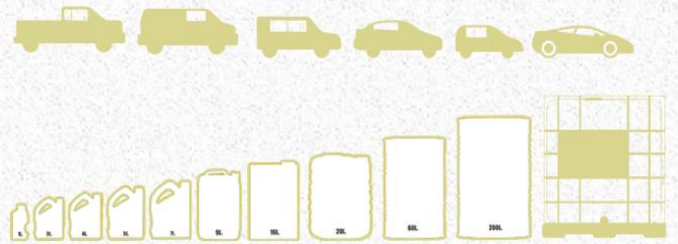

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

