

# TECHNICAL DATA SHEET

## PRO POWER 0W30 FULL SYN

### DESCRIPTION

A full synthetic lubricant that has been developed to meet the specific requirements of manufactures of new-generation and high-performance engines.

### CARACTERISTICS

- Total engine protection against corrosion for the new-generation engines under all driving conditions.
- Reduce oil consumption thanks to its low volatility.
- Reduce the hydrocarbon pollution.
- High-control of residues and mud thanks to its active cleaning feature, therefore reducing maintenance costs.

### APPLICATION


This motor oil is developed to meet the lubrication requirement gasoline and multiple-jet diesel engines.

### PERFORMANCE

- API: SN/CF

### TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,845
K. Viscosity @ 40 °C	ASTM D 445	cSt	56
K. Viscosity @ 100 °C	ASTM D 446	cSt	10,3
Viscosity Index	ASTM D 2270		174
Flash Point	ASTM D 92	°C	226
Pour Point	ASTM D 97	°C	-50

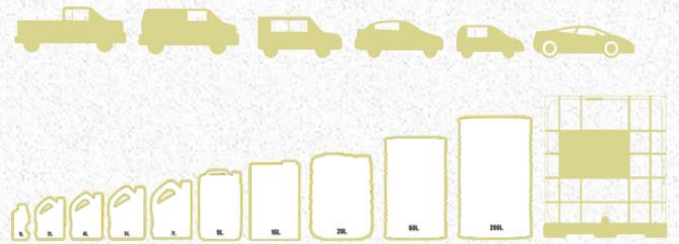

### CONTACT US

[www.woil.com.tr](http://www.woil.com.tr)  
[info@ozersahenerji.com](mailto:info@ozersahenerji.com)



Çerkeşli Köyü Yolu  
Üzeri GEBKİM Kimyacılar OSB,  
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

