

TECHNICAL DATA SHEET

PRO POWER 15W40

DESCRIPTION

Multigrade motor oil for the lubrication of gasoline and diesel engines of passenger cars with natural aspiration or turbocharging. This oil is characterized by a combination of good detergent and dispersion properties, together with a low ash content.

CARACTERISTICS

- It does not lose its protective properties even under difficult work conditions thanks to the stable durability of the film it forms.
- It preserves its properties until the next oil change thanks to its high oxidation stability.
- Total engine protection: outstanding engine cleanliness and durability.
- Cold start: excellent fluidity at low temperature.
- Drain interval extension: longer oil drain interval.

APPLICATION


It is developed to meet the lubrication requirement of the turbo diesel and heavy-duty trucks.

PERFORMANCE

- API: CF-4/SL
- VOLVO: performance VDS-3/VDS-4

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,880
K. Viscosity @ 40 °C	ASTM D 445	cSt	122
K. Viscosity @ 100 °C	ASTM D 446	cSt	15,5
Viscosity Index	ASTM D 2270		133
Flash Point	ASTM D 92	°C	230
Pour Point	ASTM D 97	°C	-29

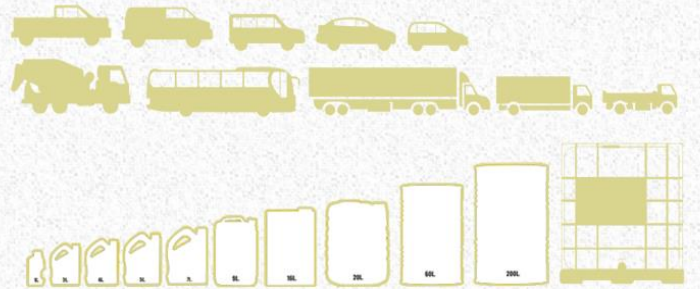

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

