

TECHNICAL DATA SHEET

PRO POWER 20W50

DESCRIPTION

A high-quality mineral diesel engine oil formulated for heavy duty vehicles under various working conditions.

CARACTERISTICS

- Total engine protection: performance in keeping the engine clean.
- It does not lose its protective properties even under difficult work conditions thanks to the stable durability of the film it forms.
- Drain interval extension: long period between oil change.
- Provides efficient protection especially for high-mileage vehicles.
- Ensures the trouble-free engine operation in all seasons thanks to its high viscosity index.

APPLICATION


High-performance on turbo diesel engine of heavy duty vehicles that are frequently subject to urban traffic.

PERFORMANCE

- API: CF-4

TYPICAL PROPERTIES

TEST	METHOD	UNIT	TYPICAL VALUES
Density @ 15 °C	ASTM D 4052	g/ml	0,88
K. Viscosity @ 40 °C	ASTM D 445	cSt	135
K. Viscosity @ 100 °C	ASTM D 446	cSt	17,98
Viscosity Index	ASTM D 2270		133
Flash Point	ASTM D 92	°C	240
Pour Point	ASTM D 97	°C	-31

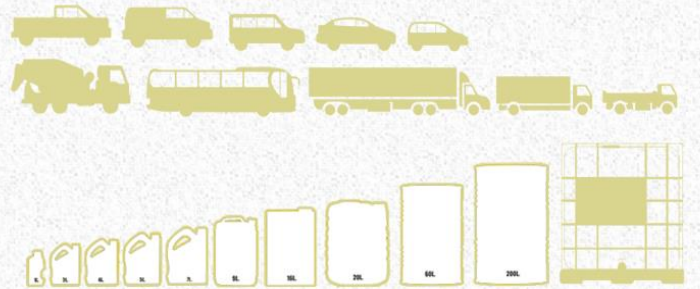

CONTACT US

www.woil.com.tr
info@ozersahenerji.com



Çerkeşli Köyü Yolu
Üzeri GEBKİM Kimyacılar OSB,
Atatürk Blv. No:4 Dilovası/Kocaeli, Turkey

